


# S-Hook Lifting Anchor

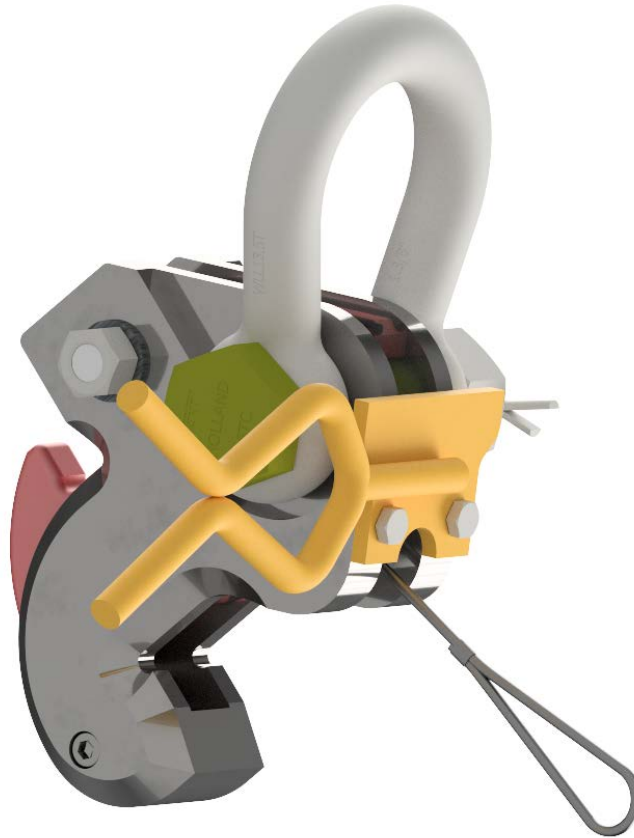


Designed for loads in parallel to normal direction relative to the riser

The Imenco S-Hook Lifting Anchor is developed with a purpose to achieve a safe handling when steel structures e.g. riser pipes are being removed during demolition and decommissioning of offshore structures. The anchor is furthermore equipped with a self-locking latch dog that will automatically activate when the anchor is correctly mounted into a pre-drilled anchoring hole.

- Robust design
- Safe lifting due to its self-locking design
- Visual indication to verify if the latching device is correctly locked
- Easy unlocking function – moderate release force
- The S-Hook Lifting Anchor can be released and subsequently re-stabbed without any manual resetting


For further information, email  
[commercial@imenco.com](mailto:commercial@imenco.com)

# S-Hook Lifting Anchor

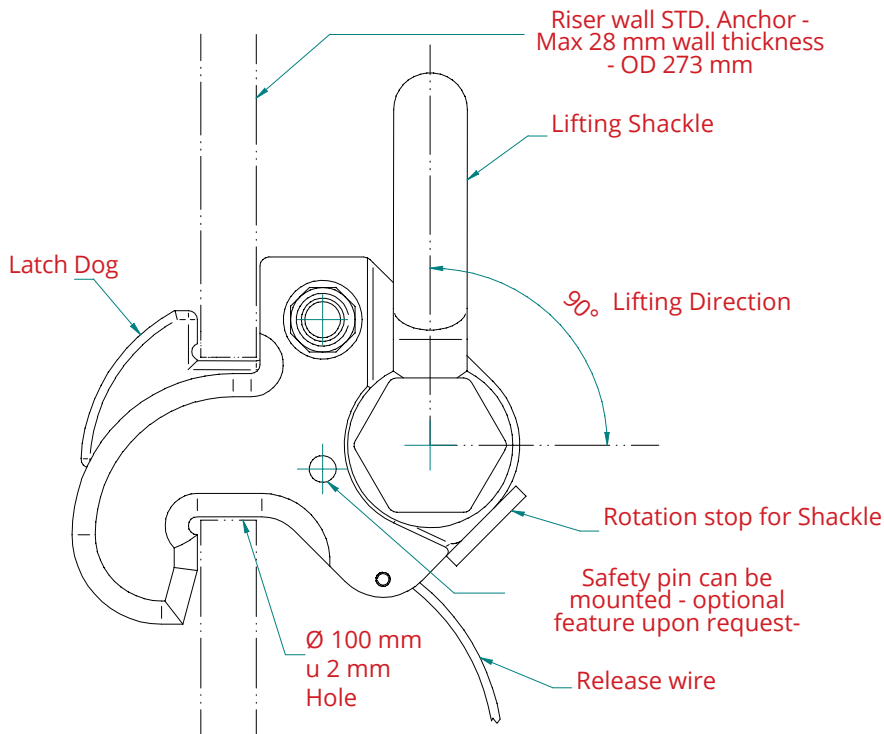


## Sequence of installation


1. Enter nose into hole



2. Rotate/lift/  
upwards



3. Anchor latched



## Versions

The Lifting Anchor is available in one version:

Model	Ref. Dwg	Wall Thickness Capacity*	OD	Weight, Dry
Std. Type	1-985	28mm	273mm	20 kgs

## Main Data

Design codes & Regulations	Materials	Surface Treatment	Load Capacity	Proof Test Load
DnV Lifting Appliances 1994	High Strength Steel	Zinc Treatment	12 Te SWL	15 Te (normal direction)