

# Tilt-table For Tie-back Connector



Smooth & Controlled  
movement during  
handling

Hydraulically operated tilt table that can be customized for all dimensions of Tie-back Connectors and Uniheads. The tilt table is designed with main objective that it shall hold and tilt a Tie-back Connector or a Unihead from horizontal to vertical position during maintenance and other workshop activities.


For further information, email  
[commercial@imenco.com](mailto:commercial@imenco.com)

**imenco**  
SMART SOLUTIONS

# Tilt-table For Tie-back Connector

## Benefits and Design

- HSE-friendly handling operation
- Modular system – easily adopted to fit other equipment
- Less crane use – eliminate need for special lifting arrangements and additional cranes
- Eliminate risk of operating under suspended load
- Reduction in manual handling, allowing for more billable hours
- Fully self-contained, integrated HPU and control panel
- Retractable wheels for easy relocation and stowaway
- Hydraulic Fluid: ISO vg32
- Operating pressure: 210 bar
- Design temp: -20° C to +50° C

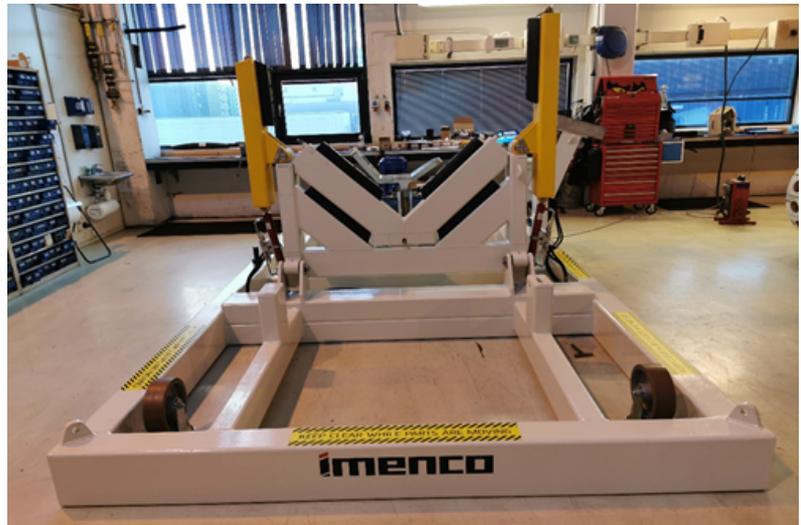

For further information, email  
[commercial@imenco.com](mailto:commercial@imenco.com)