

Walk-in Dispenser Unit



Can be delivered with standard equipment or be upgraded to project specific requirements

This walk-in and operator preferred unit can be delivered with standard equipment or be upgraded to project specific requirements. Our Walk-in Dispenser Unit is an upgraded version of our standard Dispenser Unit and fulfills all requirements for Helicopter Fuelling Systems worldwide. Our design complies with all international regulations. Most common are DNV, ABS, Lloyd, RMRS, CAP 437, NOG and OSCG.

For further information, email
imenco.aviation@imenco.com

imenco
SMART SOLUTIONS


Walk-in Dispenser Unit

Design

- 20m - 50m Hose length
- Sample glass
- Storage space for samples & sampling equipment
- Starter panel for El. Motors or pneumatic motors
- Connection for recycle unit
- Underwing nozzle with adapter
- Twin hose reel
- Flow 225 l/min
- Pressure 8.3 Barg
- Design lifetime 25 years

Materials

- SS316L Baseframe & Driptray
- SS316L Piping, Vessel & Valves
- Walk-in Enclosure in offshore Alu

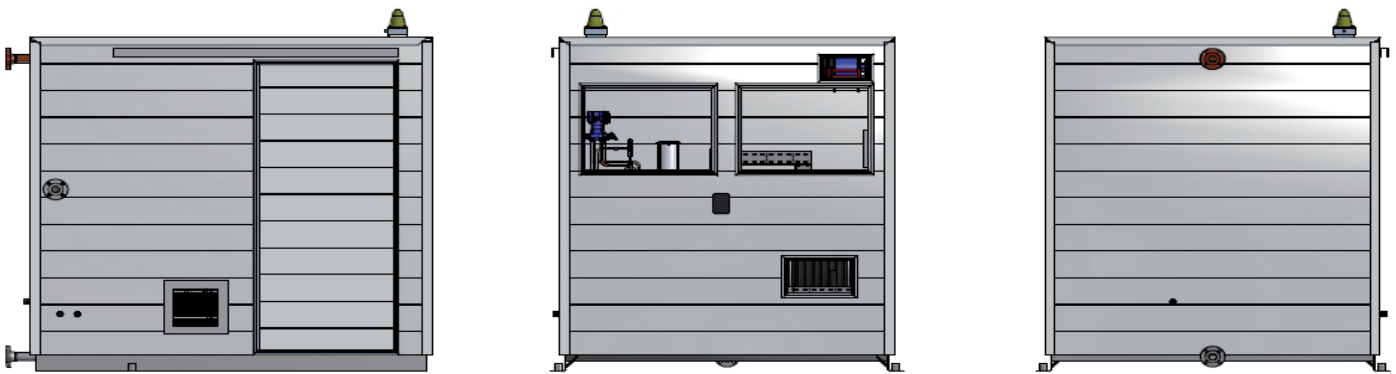

Weight and Dimensions

| Model | Hose (m) | Weight (kg) Dry/Wet | L (mm) | W (mm) | H (mm) |
|------------|----------|---------------------|--------|--------|--------|
| IDW1-25-30 | 30 | 1600/1800 | 2100 | 2500 | 2500 |